



110
04
ZOOMGATE

WING

FLAP BARRIER

The **Flap Barrier** is a popular barrier system that provides fast access clearance with minimum supervised observation. Blockage is provided by two acrylic wings. The lanes can be configured for entry, exit or bi-directional access. It is widely used in areas such as subways, immigration checkpoints, airports, factories and etc.

Safety

Each lane is fitted with safety infrared beams to ensure proper access clearing. Options to cater to children and wheelchair users are also available. Our modern motor mechanism will disengage the arm when wing movement is obstructed, providing an additional safety features for users.

AFB-AR-01



AFB-AR-02




AFB-AR-03




AFB-AR-01

Top View

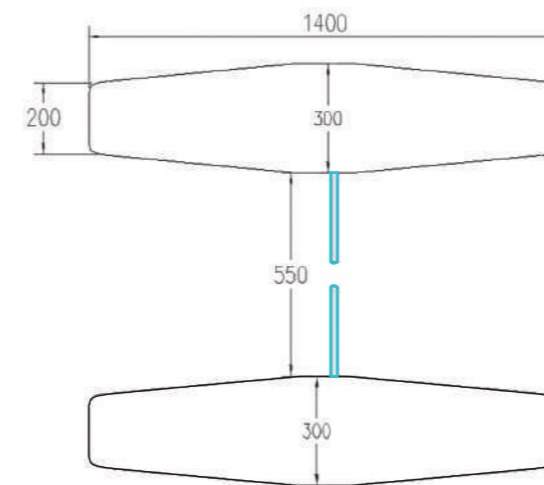

Front View

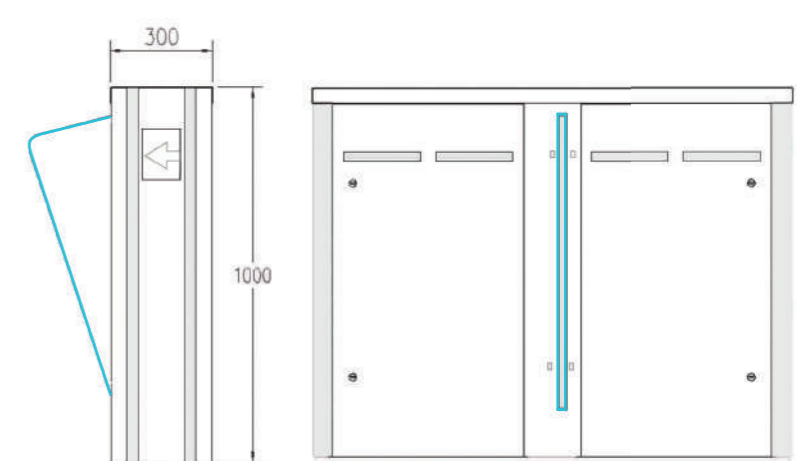

Dimension	Console height	1000mm
	Console length	836 / 1400mm
	Console width	300 / 480mm
	Passage width	550 / (900 Handicap) mm
Operation	Adjustable cycle time	0.5 - 0.8 sec
Electical	Input voltage (AC)	220V 50Hz
	Operating voltage (rated)	Typical 2.5A
	Inrush	4A
Add-ons	Tail-gate sensor	
	Crawl Sensor	
	LED Sensor	
	Reader Mounting	

*These Dimensions are for Illustration Purposes, Actual Figures are Subject to Change.

Colour: Bronze Black Champagne Silver

Finishing: Hairline Non Directional

Other designs you may like:



SWING
Swing Barrier



SPEED
Drop Arm Barrier



TRI
Tripod Turnstile



MAX
Full Height Turnstile

More customising options available, call us at +65 6755 3306 or log on to www.zoomtech.com.sg to find out more.



Zoom Tech Pte Ltd, 68 Senoko Road, Singapore 758128
T +65 6365 4715 or +65 6755 3306 | F +65 6482 3395
www.zoomtech.com.sg