

ASW-AR-09

Designed for seamless access control
in modern high-traffic environments
with intelligent security and smooth
pedestrian flow



ONE PLATFORM . TOTAL CONTROL



Compact by design
Powerful in performance.

Advanced Detection


Multi-pair infrared tracking for enhanced anti-tailgating security

Intelligent Control

Built for efficient and reliable access management

Fast & Silent





Servo-driven operation with smooth and quiet movement

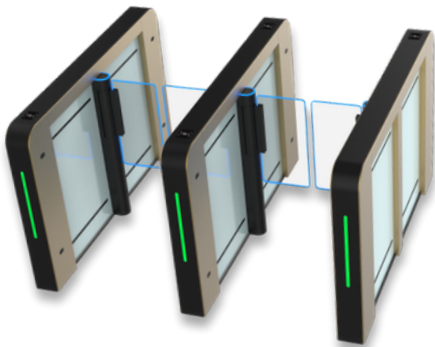

Specifications

ASW-AR-09	
CABINET SIZE	L1600mm * W140mm * H1000mm
CABINET MATERIAL	SUS304 Stainless Steel with PVD Color
PANEL MATERIAL	Acrylic (10mm)
WALKWAY WIDTH	600mm (Normal lane) 900mm (Handicap lane)
OPERATING SUPPLY	AC220V±10%
POWER CONSUMPTION	100W
MOTOR	Servo Motor
PASSING SPEED	30-50 people / min
COMMUNICATION INTERFACE	Level/pulse, RS485, RS232
WEIGHT	Single Mechanism Cabinet- 104Kg Dual Mechanism Cabinet - 115Kg
MTBF	10 Million
WORKING ENVIRONMENT	Indoor
IP PROTECTION LEVEL	IP42
LED INDICATOR	Flushed mounted into cabinet with Green / Red indicator
SENSOR	14 Pairs

Technical Drawings

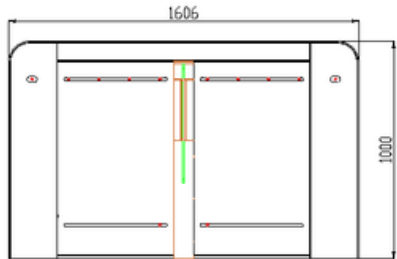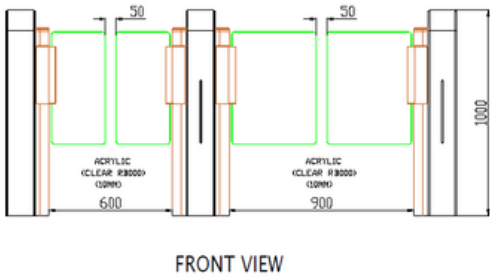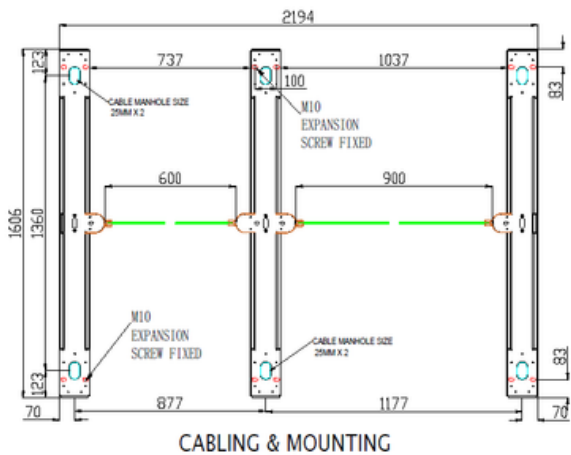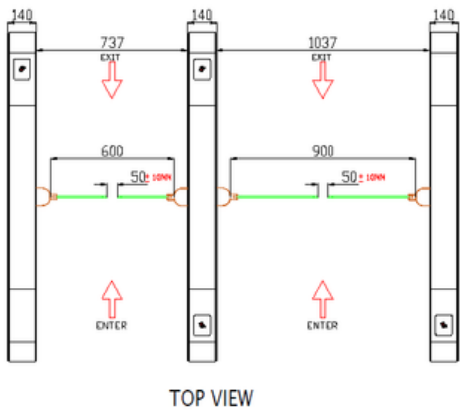

Office Buildings



Commercial Spaces



Industrial Facilities



Schools



Condominiums



Data Centres